

## ***SMW Quattro Digital***



### ***The optimized Quattro***

For optimal performance and reliability in reception of Low- and High band transmissions simultaneously, as well as both Vertical- and Horizontal polarizations, SMW has designed a Quattro based on individually tested and adjusted products. The professional Quattro consists of two professional WDL LNBs and one ortho mode transducer (OMT) protected under a plastic cover.

Comes standard with Low Phase Noise, Low Noise Figure, F- or N-connectors. Options include high LO stability, low gain, low output VSWR 1.55:1 and customized LOs.




All our LNBs are individually hand tuned to get the very best performance available for each unit. Quality and long term reliability is also essential. Therefore are all LNBs tested according to a very extensive test program, which includes heating, cooling, water-proof testing and rigorous electrical testing.

Swedish Microwave (SMW) was founded 1986 and is today a leading manufacturer of professional LNBs (Low Noise Blockdownconverters) for the Ku-band market. The company is located in Motala Sweden, and to date the products are installed in more than 80 countries.

All In-house allows custom-design products, short delivery time, high flexibility, quick service and support.

# Specification SMW Quattro Digital

SMW	Quattro Digital type E	Quattro Digital type B
Frequency range	10.7 - 12.75 GHz	10.95 - 12.75 GHz
LO frequency	9.75 GHz (Low band) 10.6 GHz (High band)	10.0 GHz (Low band) 10.75 GHz (High band)
Output frequency	950 - 1950 MHz (Low band) 1100 - 2150 MHz (High band)	950 - 1750 MHz (Low band) 950 - 2000 MHz (High band)
Spurious signals in low band high band	-60 dBm typ. @ 1700 MHz -70 dBm typ. @ 1700 MHz	-60 dBm typ. @ 1500 MHz -70 dBm typ. @ 1500 MHz
<b>General Specification</b>		
Noise figure, typical	0.9 dB	
Gain typical	52 dB	
Gain variation max.	±4 dB/each band ±0.4 dB within 30 MHz	
LO stability (over temp.)	± 3 MHz	
Age drifting	±500 kHz/year	
Phase noise typ	-75 dBc @ 1 kHz -85 dBc @ 5 kHz -95 dBc @ 10 kHz -110 dBc @ 100 kHz -115 dBc @ > 1 MHz	
Input	Circular waveguide 18 mm (see OMT drawing below)	
Cross polarization	31.5 dB min	
LO radiation	-60 dBm	
Image rejection	50 dB min.	
1 dB gain compression point	+5 dBm	
IP3	+15 dBm	
DC power	12-24V / 180 mA typ on each polarization (the DC can be feed through any of the two connectors, L-band output, of each polarization)	
Operating temperature	-30 to +60° C	
Storage temperature	-40 to +80° C	
Output connectors (waterproof)	F-connectors 75 ohm or N-connectors 50 ohm	
Output VSWR	2:1 max	
Weight	1666 g (F-connectors) 1741 g (N-connectors)	
<b>Options</b>	High stability LO, ±1 MHz over temp. High stability LO, ±1.5 MHz over temp. High stability LO, ±2 MHz over temp. Low gain Low output VSWR, 1.55:1	
<b>Accessories</b>	Adapter C120/C120 , see Feedhorn leaflet Adapter Prodelin , see Feedhorn leaflet Feedhorns, see Feedhorn leaflet	
<b>Enclosed accessories</b>	O-ring	

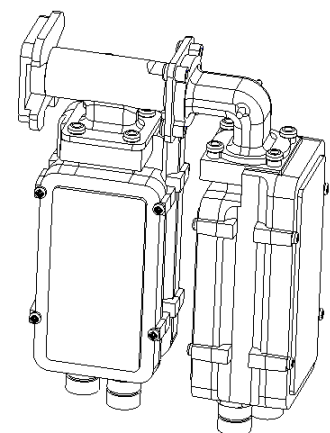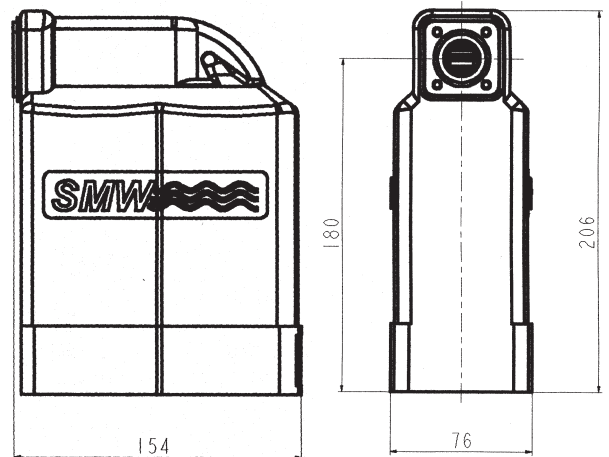

Without the plastic cover

**SMW**  
SWEDISH MICROWAVE AB

Box 230  
591 23 MOTALA, SWEDEN  
Tel. +46 141 21 61 35  
Fax. +46 141 21 52 24  
e-mail: info@smw.se  
Website: <http://www.smw.se>